



modern, interior spotlight equipped with LED light sources, available in two colour temperatures




TECHNICAL DATA	Mounting: in 3-phase track Body: high pressure die-cast aluminum Colour: white, gray, black
ELECTRICAL DATA	Power supply efficiency: >88% Electrical connection: in 3-phase track Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Light distribution: circular Way of lighting: direct Reflector: aluminum, polished, faceted
ADDITIONAL INFO	Operating temperature range: 0°C ... +35°C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums

Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
02021X.5L01.0X	27	30	3400	2500	83	3000	≥80
02021X.5L02.0X	27	30	3500	2550	85	4000	≥80
02021X.5L03.0X	34	38	4100	3200	84	3000	≥80
02021X.5L04.0X	34	38	4350	3400	89	4000	≥80

02021	.5L01.0	
		Beam angle
		1 20°
		2 40°
		Colour
		1 ☐ white
		2 ☐ gray
		3 ☐ black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
02021X.5L01.0X	240 92 235	216	1	1.4
02021X.5L02.0X	240 92 235	216	1	1.4
02021X.5L03.0X	240 92 235	216	1	1.4
02021X.5L04.0X	240 92 235	216	1	1.4

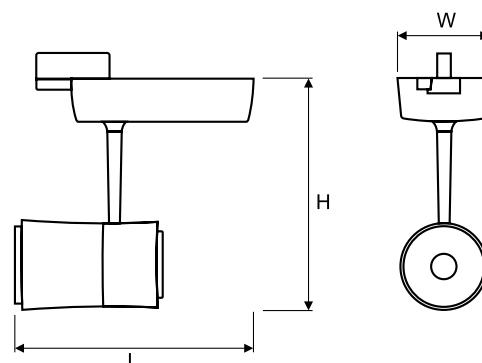

Luminous flux tolerance +/- 10%.

OTHER PICTURES



ACCESSORIES



□ 150091.00121
 ■ 150092.00122
 ■ 150093.00123


Mounting bases



□ 150091.00124
 ■ 150092.00125
 ■ 150093.00126

Recessed box

LIGHT BEAM CURVES

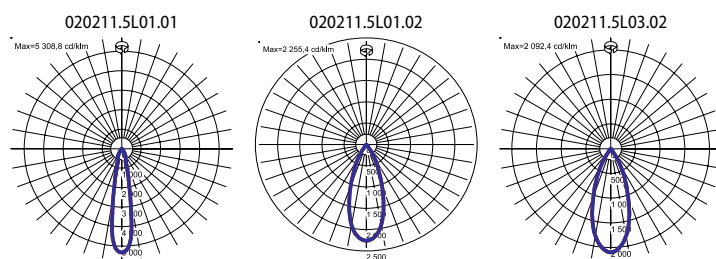

OTHER PROJECTS



Hamama Bilo, Izrael

Luminous flux tolerance +/- 10%.