



recessed modern downlight, for suspended ceilings for integrated LED modules




TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: high pressure die-cast aluminum Colour: black and white
ELECTRICAL DATA	Power supply efficiency: >85% Electrical connection: max 2x1,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Light distribution: circular Way of lighting: direct Reflector: aluminum, polished, faceted
ADDITIONAL INFO	Available on request: DALI Operating temperature range: 0°C ... +30°C Additional equipment: lamp rings made of black die-cast aluminium
GENERAL DATA	Lifetime (L70B50): 50 000 h Warranty: 3 years + 2 years after project registration Application: boutiques, delicatessen, supermarkets, jeweler, museums, reception desks, restaurants

Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Protection Class: II								
030321.5L11.311	22°	16	18	2000	1500	83	3000	≥81
030321.5L11.312	30°	16	18	2000	1450	81	3000	≥81
030321.5L11.313	42°	16	18	2000	1450	81	3000	≥81
030321.5L12.311	22°	16	18	2000	1500	83	4000	≥81
030321.5L12.312	30°	16	18	2000	1450	81	4000	≥81
030321.5L12.313	42°	16	18	2000	1450	81	4000	≥81
030321.5L13.321	22°	22	25	3000	2350	94	3000	≥81
030321.5L13.322	30°	22	25	3000	2250	90	3000	≥81
030321.5L13.323	42°	22	25	3000	2300	92	3000	≥81
030321.5L14.321	22°	22	25	3000	2350	94	4000	≥81
030321.5L14.322	30°	22	25	3000	2250	90	4000	≥81
030321.5L14.323	42°	22	25	3000	2300	92	4000	≥81
030321.5L15.321	22°	35	39	4300	3400	87	3000	≥81
030321.5L15.322	30°	35	39	4300	3100	79	3000	≥81
030321.5L15.323	42°	35	39	4300	3100	79	3000	≥81
030321.5L16.321	22°	35	39	4500	3200	82	4000	≥81
030321.5L16.322	30°	35	39	4500	3300	85	4000	≥81
030321.5L16.323	42°	35	39	4500	3300	85	4000	≥81


Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Protection Class: II					
030321.5L11.311	140 105	130	440	1	0.8
030321.5L11.312	140 105	130	440	1	0.8
030321.5L11.313	140 105	130	440	1	0.8
030321.5L12.311	140 105	130	440	1	0.8
030321.5L12.312	140 105	130	440	1	0.8
030321.5L12.313	140 105	130	440	1	0.8
030321.5L13.321	165 120	155	440	1	1.0
030321.5L13.322	165 120	155	440	1	1.0
030321.5L13.323	165 120	155	440	1	1.0
030321.5L14.321	165 120	155	440	1	1.0

Luminous flux tolerance +/- 10%.

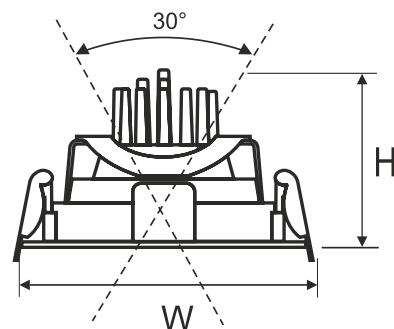

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Protection Class: II					
030321.5L14.322	165 120	155	440	1	1.0
030321.5L14.323	165 120	155	440	1	1.0
030321.5L15.321	165 120	155	440	1	1.0
030321.5L15.322	165 120	155	440	1	1.0
030321.5L15.323	165 120	155	440	1	1.0
030321.5L16.321	165 120	155	440	1	1.0
030321.5L16.322	165 120	155	440	1	1.0
030321.5L16.323	165 120	155	440	1	1.0

LIGHT BEAM CURVES

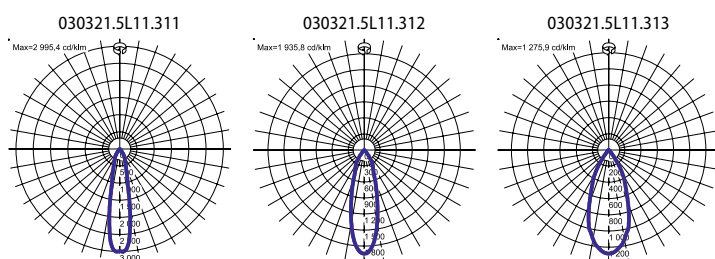

Luminous flux tolerance +/- 10%.